


FRIALEN®-Installation kits BS for Ball Valves and Tapping Ball Valves (Standard and Top-Loading)

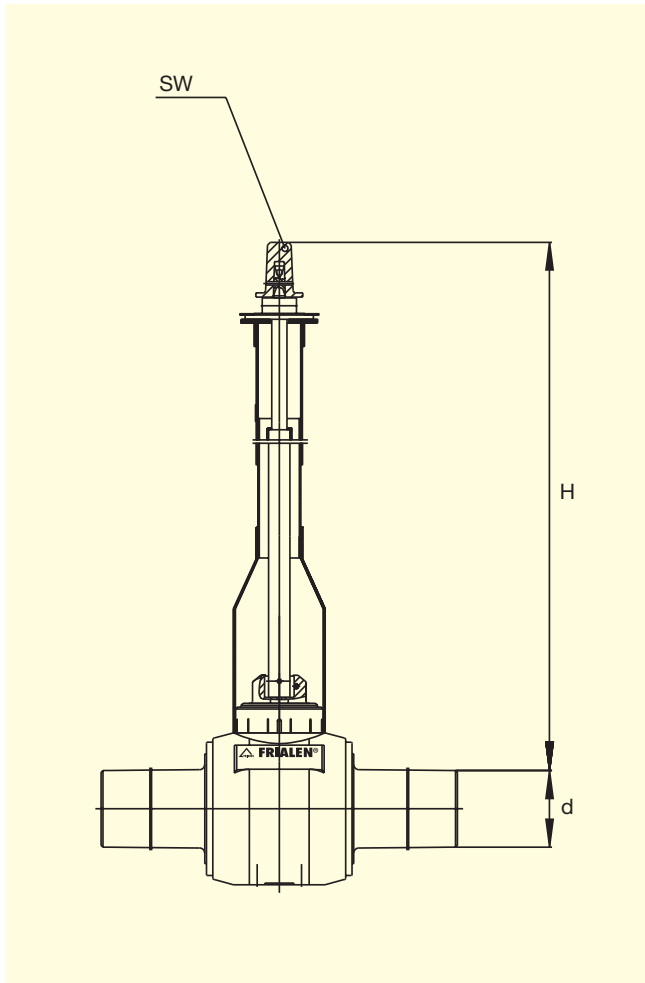

d	H in m	Order Ref.	Stock-status	VE	PE	SW	Weight kg/each
32-50	0.45 - 0.7	T-615 741	1	1	42	30	2.620
32-50	0.6 - 1.0	T-615 957	1	1	42	14	1.700
32-50	0.6 - 1.0	T-615 328	1	1	42	30	3.140
32-50	1.0 - 1.5	T-615 330	1	1	42	30	3.920
32-50	1.2 - 2.0	T-616 068	2	1	42	14	3.300
32-50	1.2 - 2.0	T-615 329	2	1	42	30	4.600
63-225	0.6 - 1.0	T-615 958	1	1	42	14	1.700
63-225	0.6 - 1.0	T-615 310	1	1	42	30	3.650
63-225	1.0 - 1.5	T-615 331	1	1	42	30	4.760
63-225	1.2 - 2.0	T 616 069	2	1	42	14	3.450
63-225	1.2 - 2.0	T 615 311	2	1	42	30	5.990

Please turn over for important information regarding application of **FRIALEN®**-Installation kit BS

FRIALEN[®]-Installation kits BS for Ball Valves and Tapping Ball Valves (Standard and Top-Loading)

Areas of Application

Telescopic actuating linkage for operation of the FRIALEN[®] KHP, AKHP und AKHP-TL from the valve cover.

Assembly Instructions

Before fusion the FRIALEN[®]-KHP, AKHP and AKHP-TL must be lined up to suit the type of actuation intended, in order to ensure that the installation kit BS will seat correctly.

Eight good reasons for using the FRIALEN[®]-Installation kits BS

- **Stepless adjustment in the stated range (pipe cover H) without the use of tools, even in the installed state**
- **Self supporting in any extended position**
- **Safe from being pulled out**
- **Corrosion proof**
- **Telescope assembly set can be adjusted even once in place and filled**
- **Constructive harmonizing of the transferable torque onto the FRIALEN[®]-Ball Valve**
- **Connection pins made from stainless steel**
- **Coloured marking disk for use with gas and water.**

Please find our datasheets for downloading on the internet at www.friatec.de

For further information, please call our FRIALEN[®]-customer service staff and specialist advisers.