


FRIALEN® -kolano W45°**PE 100 SDR 11**

Maksymalne dopuszczalne ciśnienie robocze 16 bar (woda) / 10 bar (gaz)

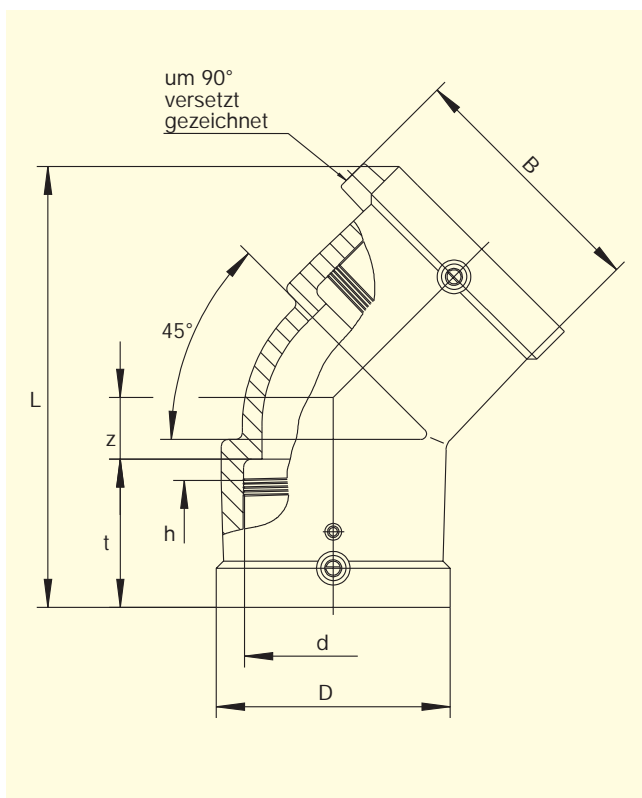

d	nr katal.	Status magaz.	VE	PE	D	L	t	z	h	B	masa kg/szt.
32	T-612-092	1	30	960	49	108	42,0	10	21,0	61,0	0,093
40	T-612 094	1	20	640	58	125	45,5	17	23,0	69,5	0,143
50	T-612 096	1	15	480	70	145	53,0	18	27,0	80,0	0,210
63	T-612 098	1	15	270	84	153	55,0	22	39,0	93,5	0,297
75	T-612 100	1	15	270	98	174	61,0	21	37,5	-	0,516
90	T-612 102	1	8	144	117	208	71,5	27	42,8	123,0	0,751
110	T-612 104	1	10	80	142	252	83,0	37	47,0	157,0	1,287
125	T-612 106	1	10	80	158	260	85,0	36	51,0	162,0	1,642
160	T-615 275	1	4	32	199	300	96,0	40	59,0	198,0	2,794
180	T-615 687	1	3	24	228	382	103,0	76	65,0	-	4,500
225	T-615 688	1	1	8	283	460	118,0	97	80,0	-	10,000

kolana W90 FRIALEN- można zgrzewać z rurami typoszeregu SDR 11 - 17.6